



0800 000 168
14 Harrow Street, Dunedin
tmcteam.co.nz

TL-400

Deployable portable lighting in one
bespoke robust package.



SCAN ME

Portable Light Tower




SPEEDY DEPLOYMENT

MULTIPLE LIGHTING DISTRIBUTION




Single latch to release tripod

Deploy or fold in seconds.

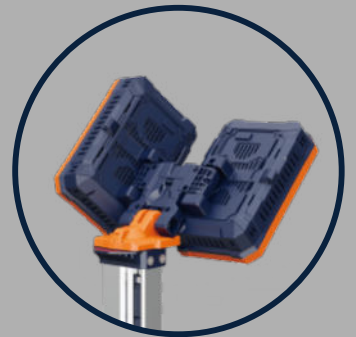

Self-locking Pole

Drag & Lock at any position, contraction in one push.

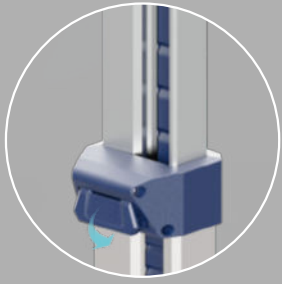

Press down to fold the pole



180°

180°

330°

360°+
up/ down/ left/ right adjustable

In built damping mechanism for ease of adjustment to cover lighting area required.



Ultra-long Endurance

Standard Mode Up To **20+** Hours
(3xD24-100)

Control Board

- 
- Power
 - DIM+
 - DIM-
 - Battery Level
 - Brightness
 - USB Output
 - AC Plug



Application




Emergency



Infrastructure



Railway



Event



Maintenance




Mining



Sport




Construction

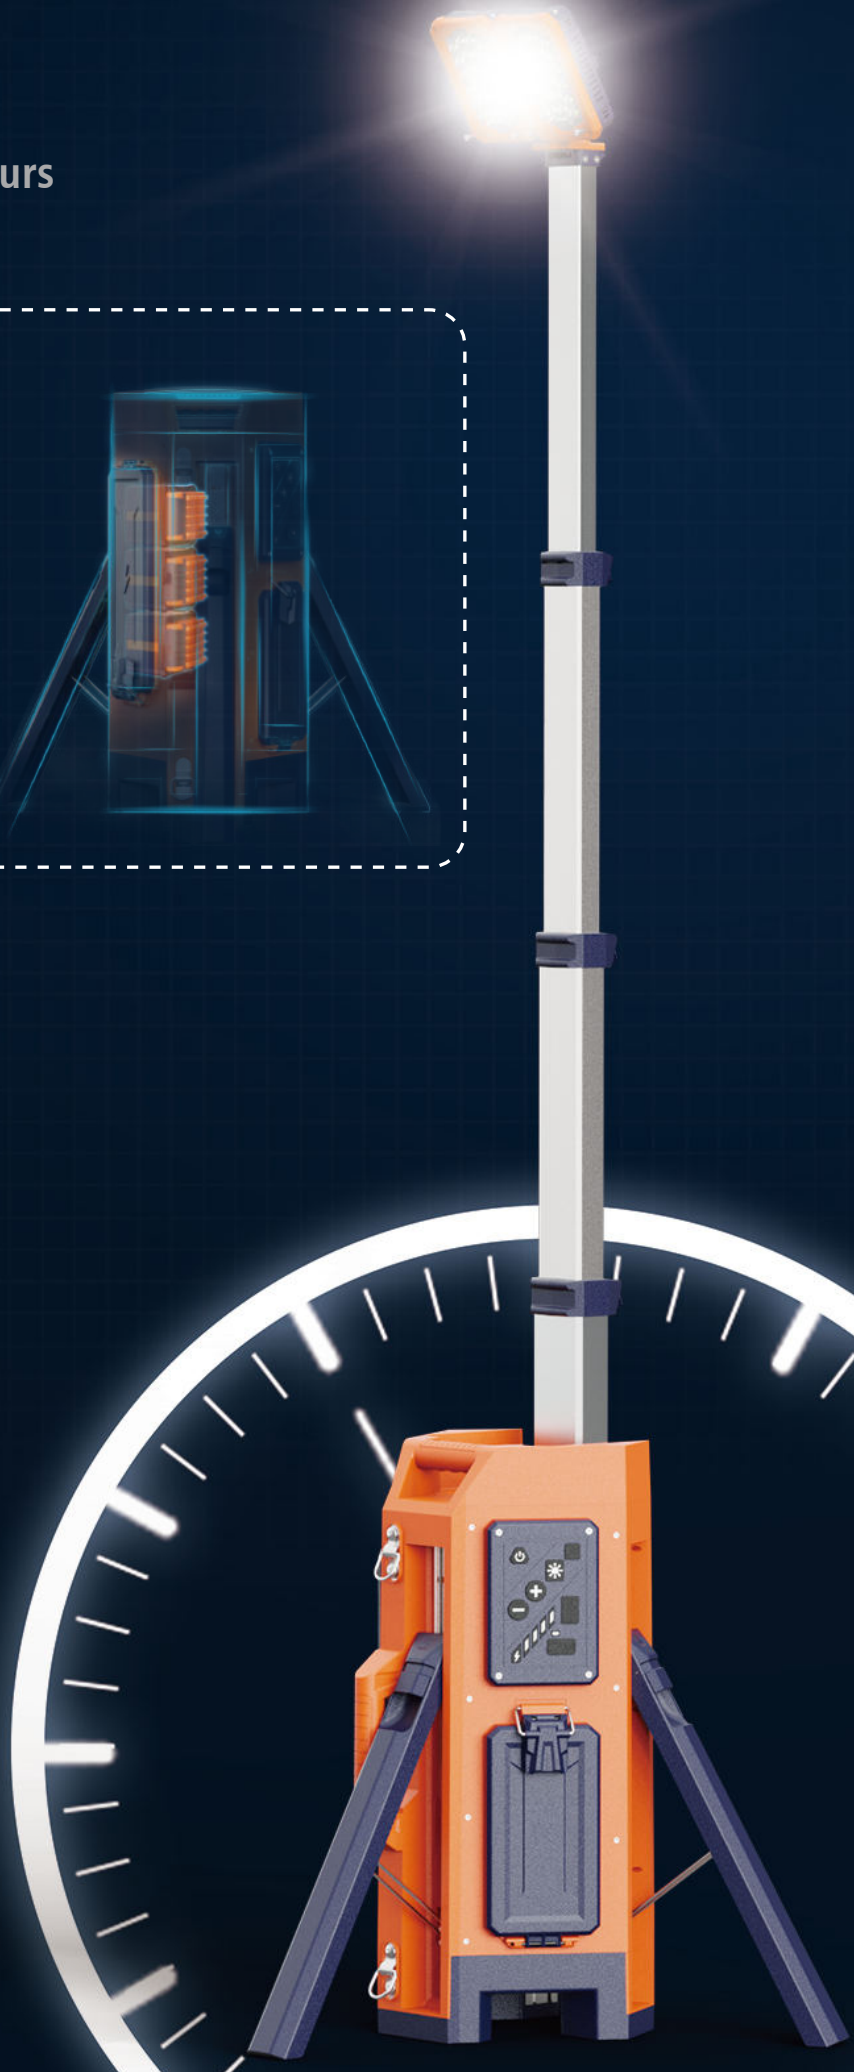

AC Powered
Up To **17,000** LM

Battery-powered
Up To **10,000** LM

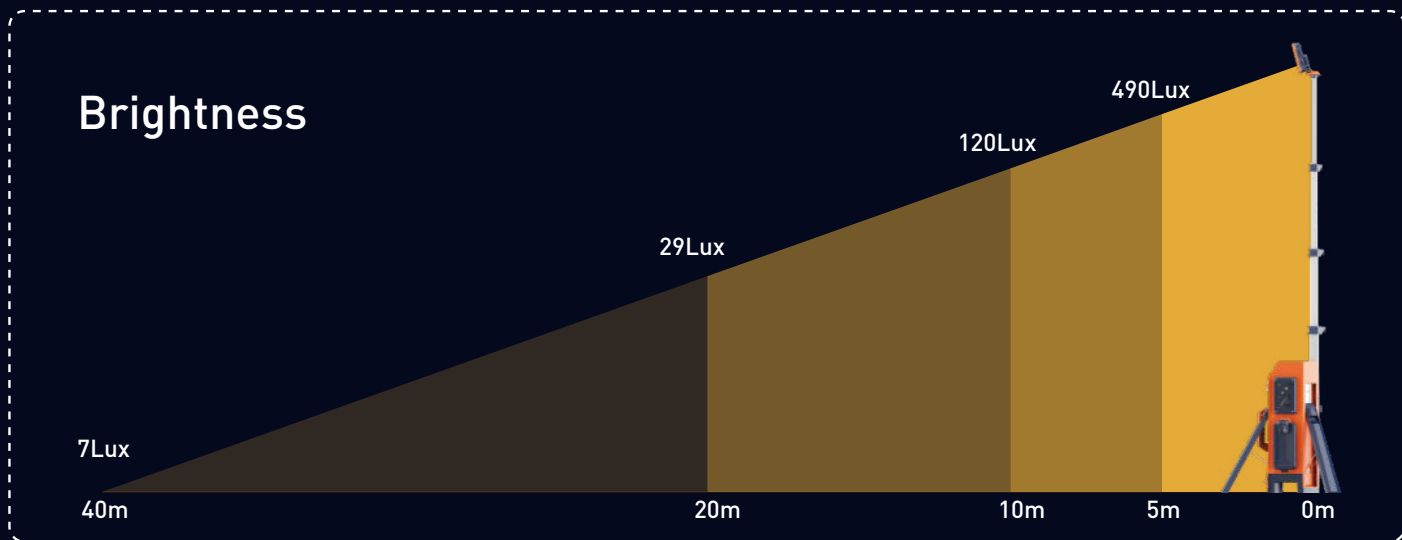

* 'Brightness' represents the center point illuminance value of the lighting direction.

AC	0-17,000LM Stepless Dimmable	
Battery (4 Mode)	Turbo	10,000LM
	Standard	6,300LM
	Balanced	3,800LM
	Eco	1,000LM



Lighting Area
1100m²

* 'Lighting Area' represents the total lighting area of which > 1Lux.

One-person Operation

Transport, deploy, adjust lighting in seconds with one operator.



Dual handle & strap available, 10Kg.



Optional Accessories

9 Bay Simultaneous Rapid Charger (TKC-9)

Carry 9 battery packs, charge them for off-grid light tower operation for up to a week.



Achieve 15000LM full brightness with the driver, or operate wirelessly using a battery and charger.

Cover all possibilities with a choice of Power Options.

Battery (D24 Series)

Charger (MC-2)

Driver (X1-75-56BH)

Charger (MC-1)

S3 Flash Light

T2 Head Light

TL400 is a main light source that doubles as a USB charger for T2 headlamps, S3 flashlights, and mobile devices.

Fully equipped for any challenges in the dark!



Specifications



TL-400

Hight	64.5cm~220cm
Weight	10Kg (Fitting only)
Power Supply	Battery / AC 100-277V
Lumens	0 - 15,000Lm
Run Times	>20 hours (Standard mode, D24-100)
IP Grade	IP65
Output(USB)	5V 2A (2 Dock)
Battery System	D24-100

Battery (D24-100)

Rated Power	98Wh
Rated Voltage	24.5V
Rated Capacity	4.0Ah
Working Temperture	-10~50℃
Working Humidity	1~98%

Size (mm)

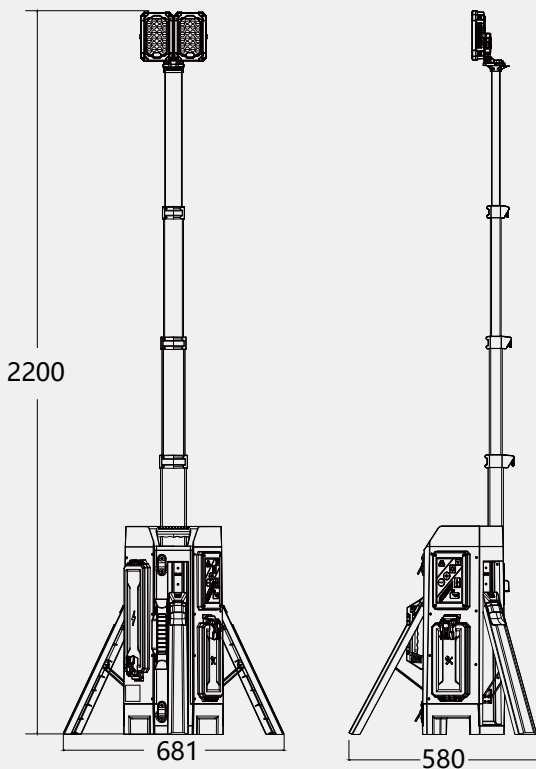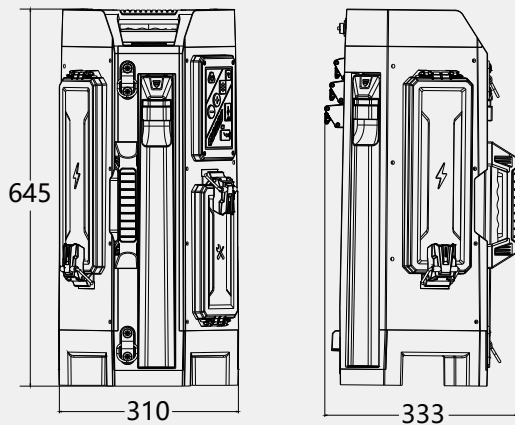

Package

Size of Carton	Gross Weight of Carton	PCS/Carton
730x390x410mm	13.3kg±5%	1



TRAFFIC MANAGEMENT & CONTROL LTD

Tel: 0800 000 168

Web: tmcteam.co.nz

E-mail: sales@tmcteam.co.nz

Address: 14 Harrow Street, Dunedin

