



TL-500

**SINGLE-PERSON OPERATED
BATTERY POWERED
PORTABLE LIGHT TOWER**



SCAN ME

TRAFFIC MANAGEMENT & CONTROL LTD

☎ 0800 000 168

🌐 tmcteam.co.nz

📍 14 Harrow Street, Dunedin

✉ sales@tmcteam.co.nz

ZERO

- NOISE
- EMISSIONS
- FUEL CONSUMPTION



0dB Quiet Operation



50Kg-Class Single-Person Rapid Deployment



0 Diesel Cost



Triple Wheel + Self-Locking Leg Adapts To All Terrains



0 Carbon Emissions



IP65 Weatherproof Wind Resistance Level 8



0 Maintenance Cost



Lithium Battery Powered Versatile For Various Sites



0 Trailer Cost



Fully Rotatable Head & Adjustable Beam Angle For Versatile Lighting Area

TL-500 cuts both equipment and life-cycle consumption / transportation / maintenance costs compared to the traditional fuel generator light tower.

COST



MOS (Months of service)



High Elongation Ratio For Easy Storage And Transport

5.3m

4.2m


1.2m

1.3m



Unique Cloud-Axis Electric Telescopic Pole

Original mechanical structure that maximizes weight reduction while maintaining stability.

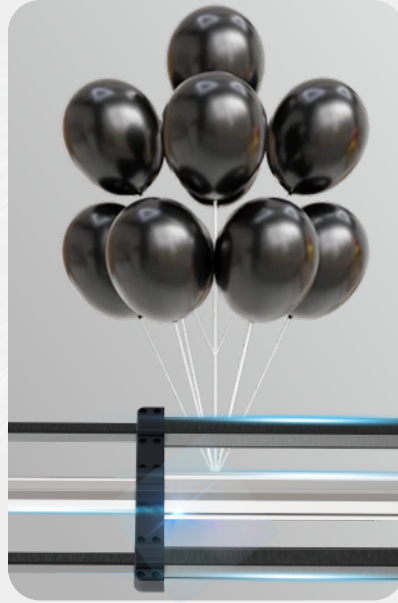

IP65, resistant to 8-level winds, corrosion-resistant, available in most climates.



Each lamp head can be adjusted freely.

Unidirectional
Multi-Point Lighting




360° Lighting with
Adjustable Coverage



180° rotation around the
shared X-axis of the two
modules



360° rotation around
the X-axis

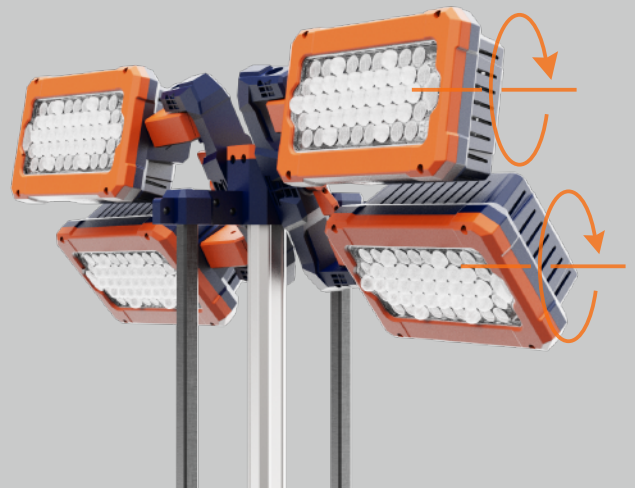

180° rotation
around the Y-axis




Multi-Level Self-Locking Support Legs


Adapt to all terrains, whether it is steps, slopes or potholes.



Integrated dual-axis level, easily find the balance point

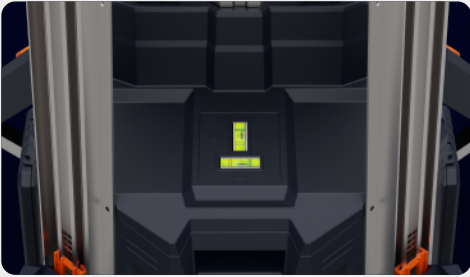

Unique Coaxial 3-Wheel Design



Easy one-person transport on any terrain.



Special slots are compatible with small warning lights.



A handle that provides the best grip doubles as lift point.




Climbs heights without a forklift if necessary.



Stays stable on muddy ground with maximum contact surface.


Wading depth up to 10cm refers to the water line mark on the light tower body.

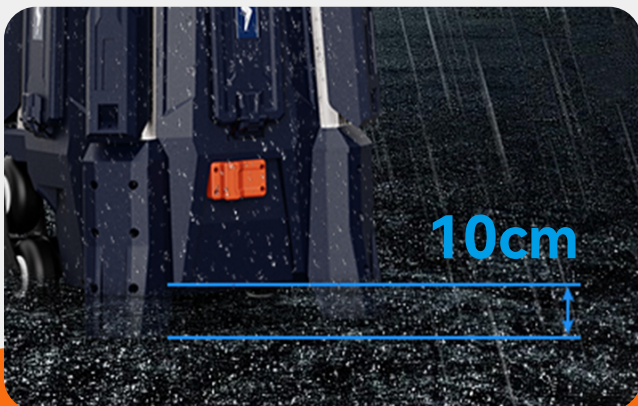


Humanized Design Hidden In The Details

Handheld controller

With spring wire, no need to bend over to operate.

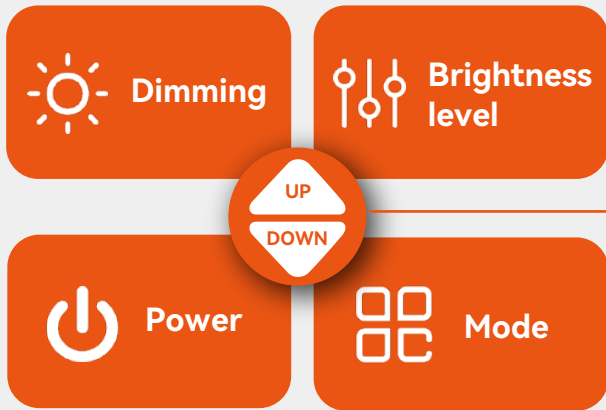

Multifunctional storage space design

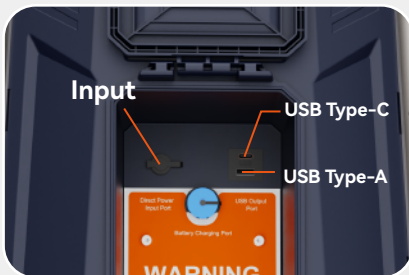


Equipped with multiple interfaces to charge devices

Waterproof toolbox

Didn't change the battery in time? Don't worry.

Disengage the clutch, then manually retract the pole.

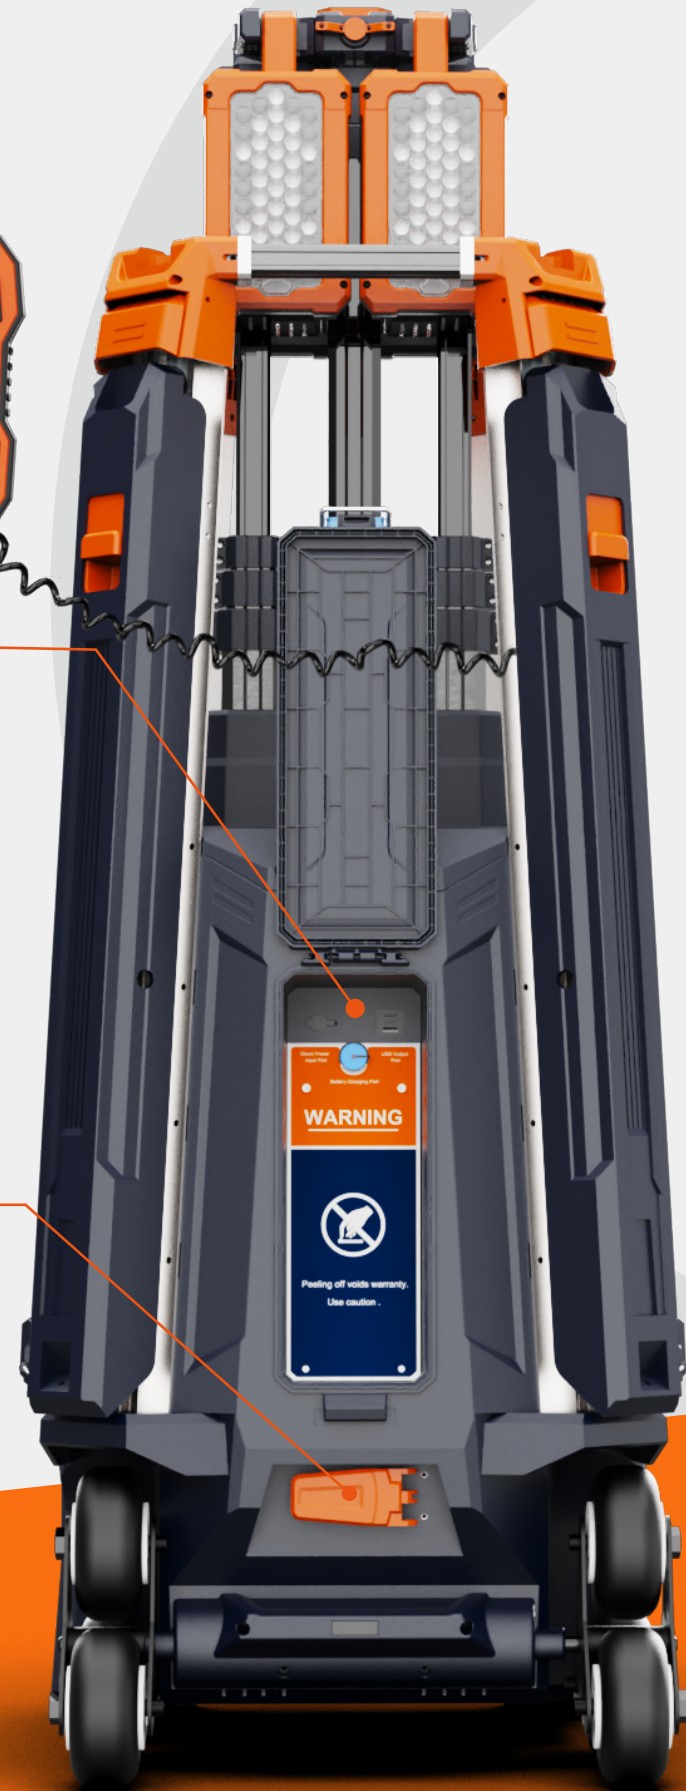

Ultra-Long Working Hours



D24-500 (3Kg)

Portable lithium battery with large capacity in a small size




10 - 100 Hours

Turbo Mode

Eco Mode

With 3 of fully charged battery power alone, it can provide 10-100 hours lighting.

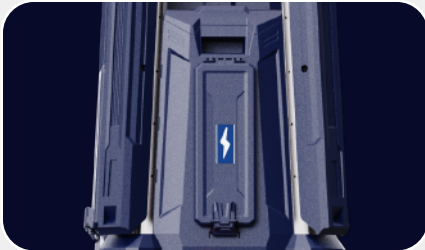


X3

It also supports using an AC driver for direct power connection.



High-Efficiency LED Light Source

Free switching of multiple angles.

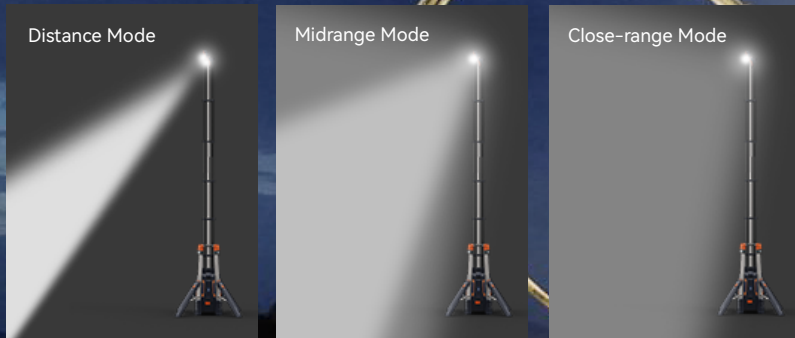

4.2M

Battery-powered
Up To

33,000LM

5.3M

Battery-powered
Up To

35,000LM

4 Levels of Brightness (Battery Powered)

Eco Balanced Standard Turbo



5.3M 3,000LM 10,000LM 18,000LM 35,000LM

4.2M 2,800LM 9,500LM 17,000LM 33,000LM

The brightness and battery level can be viewed on the controller when using batteries.



4.2M

AC Powered
Up To

62,000LM



5.3M

AC Powered
Up To

65,000LM

Stepless Dimmable (AC Powered)

Stepless dimming possible

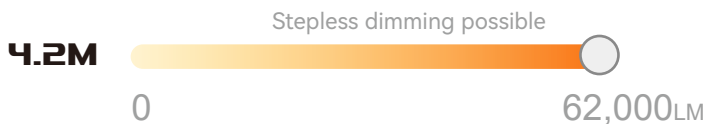

When AC powered, knob on driver controls 0-100% dimming.



Optional Accessories

A variety of accessories are available to expand the power supply options.



Charger (MC-2H)



Battery (D24-500)



Driver - AC100-277V Input (X5-320)



TKC-9H

FS8-200

9 Bay Charger Case (3x D24-500 Available)
+ Solar Panel



One-Person Operation

Only one operator is needed to transport, deploy, and adjust lighting.



Construction



Mining



Emergency



Sport



Firefighting




Event

The total light tower weight is

(excluding battery pack).

50 kg (4.2m) **52 kg** (5.3m)

For quick deployment in emergencies this equipment fits easily into standard SUVs for single-person loading. ★

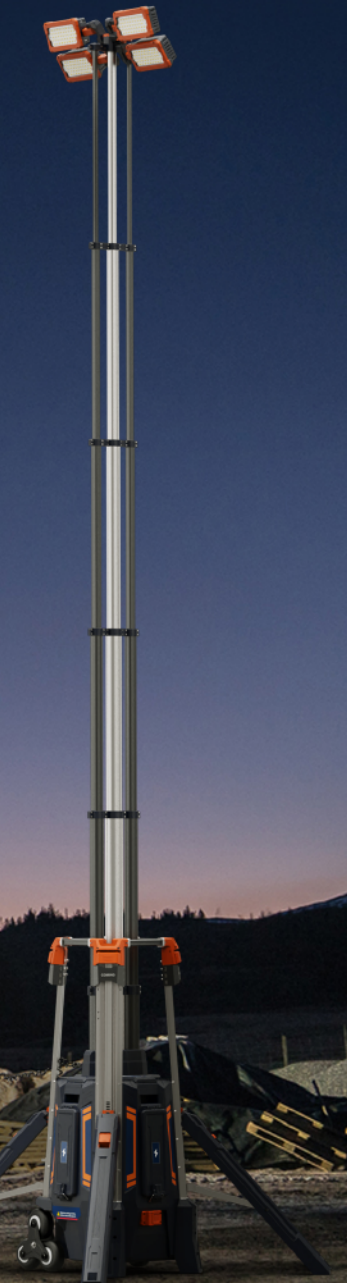

Parameter


TL-500 4.2m

Height	4.2m
Weight	50Kg (Fitting only)
Power Supply	Battery / AC 100-277V
Lumens	Battery 0-33,000LM / AC 0-62,000LM
Run Times	>20h (Standard mode, D24-500 x 3)
IP Grade	IP65
Output(USB)	Type-A (5V 2A) & Type-C (5V 2A)
Battery System	D24 Series

TL-500 5.3m



Height	5.3m
Weight	52Kg (Fitting only)
Power Supply	Battery / AC 100-277V
Lumens	Battery 0-35,000LM / AC 0-65,000LM
Run Times	>20h (Standard mode, D24-500 x 3)
IP Grade	IP65
Output(USB)	Type-A (5V 2A) & Type-C (5V 2A)
Battery System	D24 Series

Size (cm)

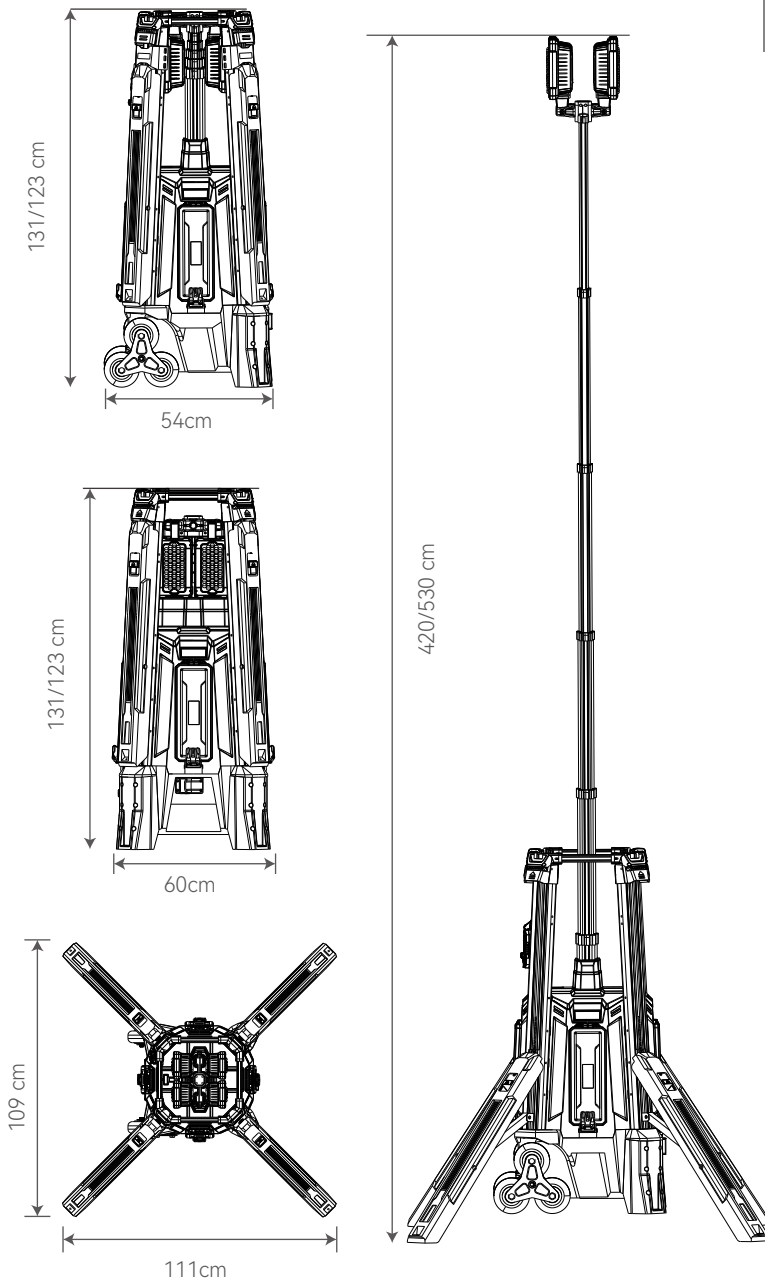


Package

Model	Size of Carton	Gross Weight of Carton	PCS/Carton
TL-500 4.2m	640*640*1365mm	63Kg	1
TL-500 5.3m	640*640*1435mm	66.5Kg	1

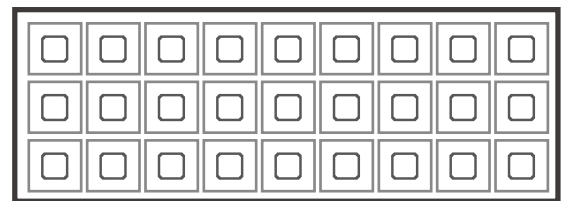

20GP Container

27 Unit

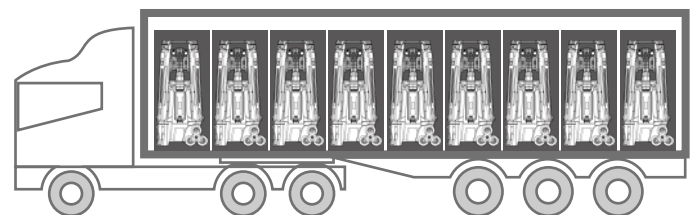

40GP Container

54 Unit